


PTFE-Glattschlauch Typ – BT2

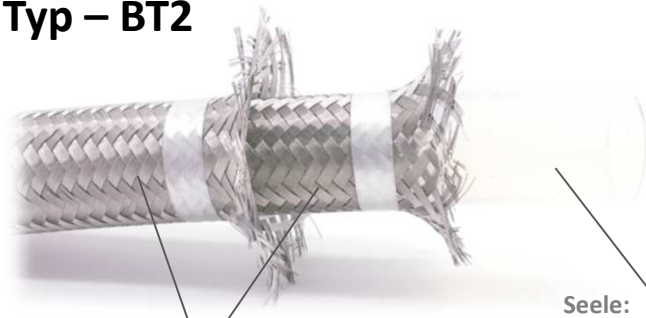

Deckschicht:
2-fach Köppellage aus Edelstahl 1.4301

Seele:
Virginale PTFE- Seele 1-1,5mm stark

BT2 – PTFE-Glattschlauch mit doppelter Klöppellage							
	Nennweite NW/DN	Innen Ø [mm]	Außen Ø [mm]	Arbeitsdruck [bar]	Berstdruck [bar]	Biegeradius [mm]	Gewicht [kg/m]
BT2-06	06	6,4	11,5	275	1100	75	0,23
BT2-08	08	8,1	13,0	250	1000	100	0,30
BT2-10	10	10,5	16,0	225	900	120	0,38
BT2-13	13	13,0	19,0	200	800	135	0,46
BT2-16	16	15,8	22,0	175	700	160	0,58
BT2-20	20	20,8	28,0	150	600	200	0,84
BT2-25	25	25,0	31,5	130	520	250	0,92
BT2-32	32	31,5	39,5	70	280	500	01,30
BT2-40	40	38,0	50,0	50	200	850	1,90

Arbeitstemperatur -70 bis +260°C (Korrekturfaktoren: 24°C ⇔ 1,0 _ 100°C ⇔ 0,95 _ 150°C ⇔ 0,9 _ 200°C ⇔ 0,83)